




Samsung Galaxy Tab 10.1 Battery Replacement

Use this guide to help you remove your battery on your Samsung Galaxy Tab 10.1.

Written By: Jess McCafferty

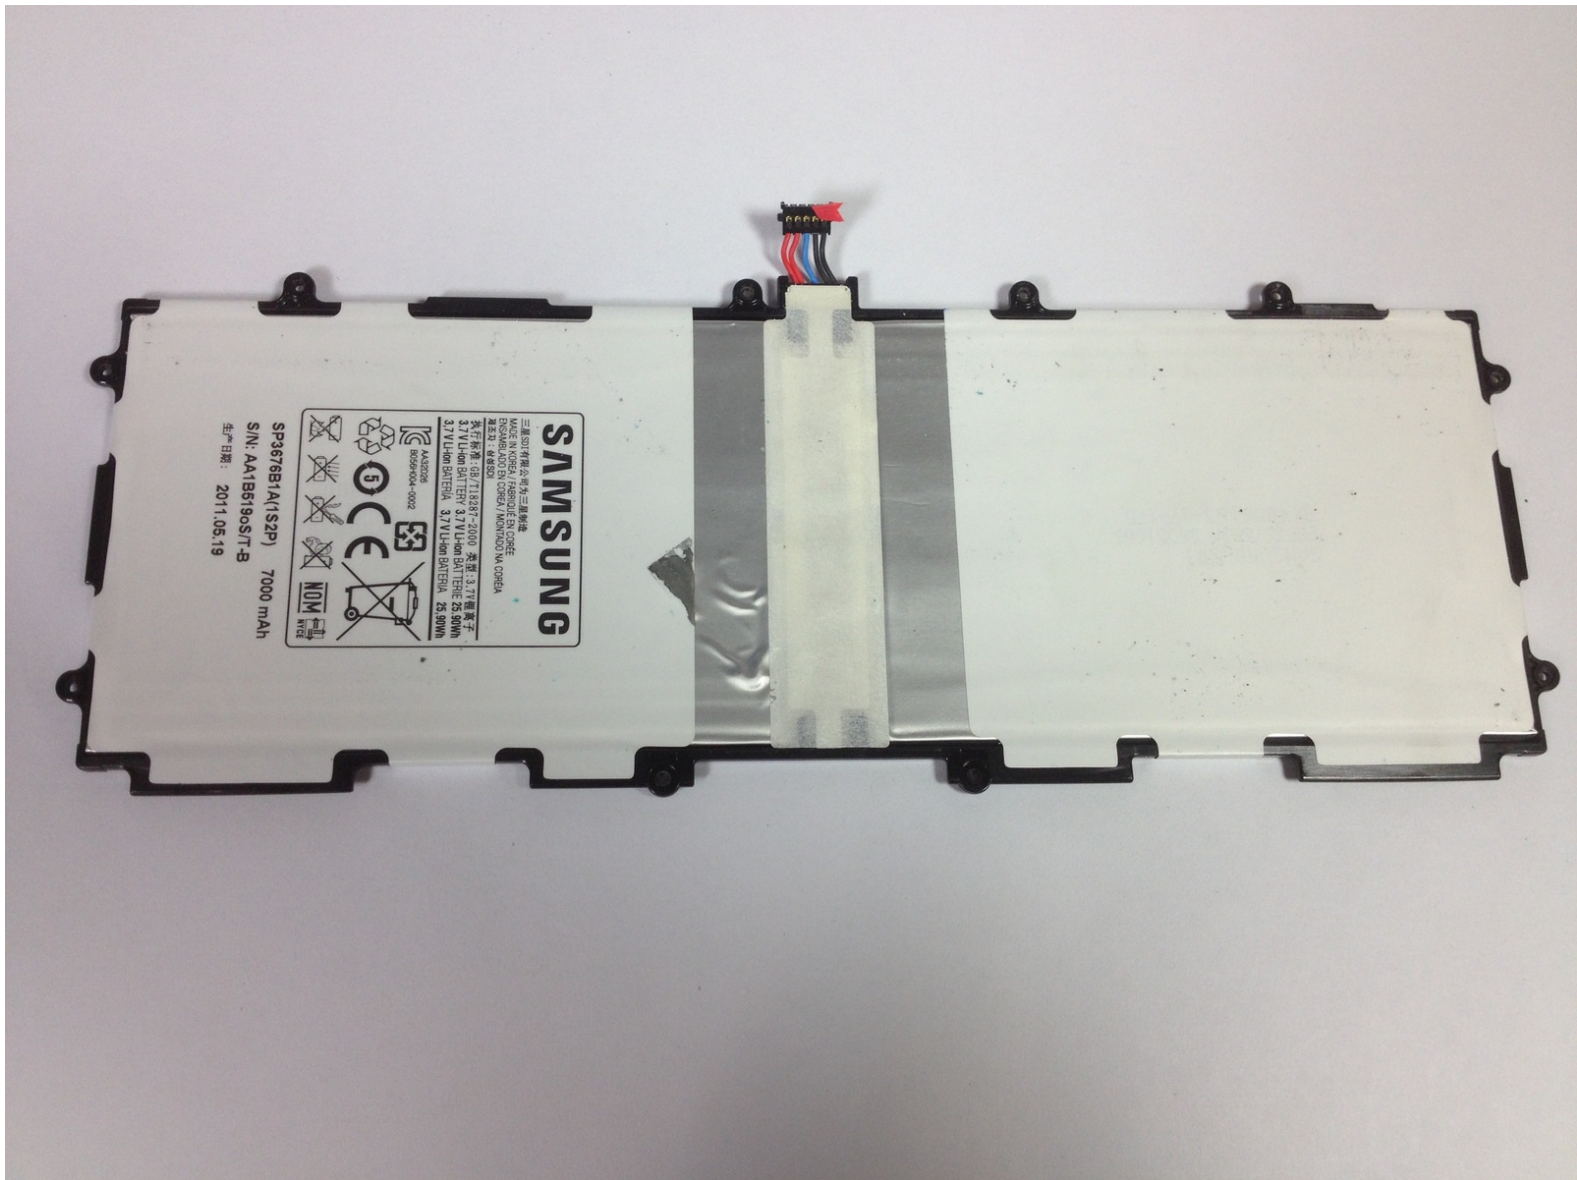

INTRODUCTION

In this guide, you will learn how to replace the battery on your Samsung Galaxy Tab 10.1. Having a bad or broken battery can be frustrating. There are a couple prerequisites we need to get out of the way first!



TOOLS:


- [iFixit Opening Tools](#) (1)
- [Phillips #00 Screwdriver](#) (1)
- [iFixit Opening Picks set of 6](#) (1)
- [Y1 Tri-wing Screwdriver](#) (1)



PARTS:

- [Samsung Galaxy Tab 10.1 Battery](#) (1)

Step 1 — Rear Panel

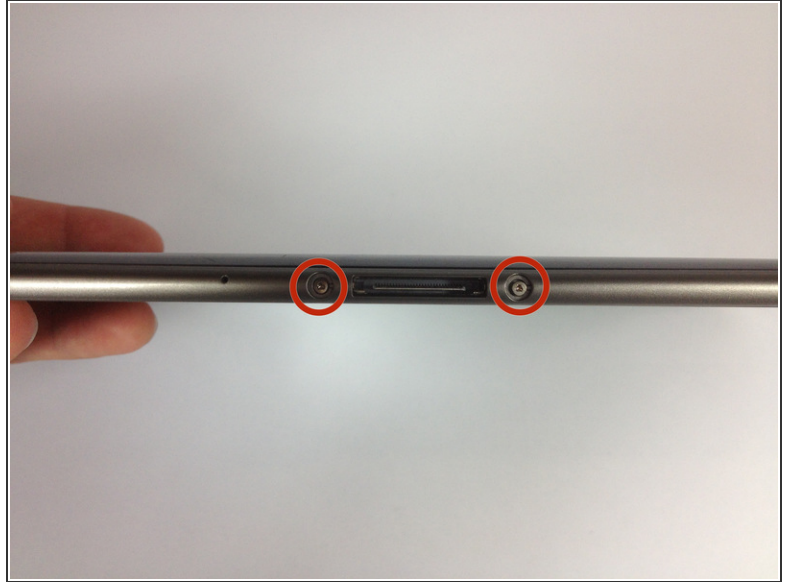

- Place the bottom of the tablet towards you.
- Remove the two 4.1 mm screws near the charge port with a Tri-Wing screwdriver.

Step 2




- Start in the middle of the left side and insert a plastic opening tool between the rear panel and the front panel assembly.
 - Carefully run the plastic opening tool along the left and top edge to pry the rear panel away from the rest of the device.
 - ⓘ Place opening picks along the side you have already pried open to keep the back panel detached from the rest of the device.
- ⚠ Be sure to work carefully, as prying too firmly can crack the screen.

Step 3




- Using the plastic opening tools, continue to carefully run along the right and bottom edge, and then lift the screen from the back panel.

Step 4 — Battery

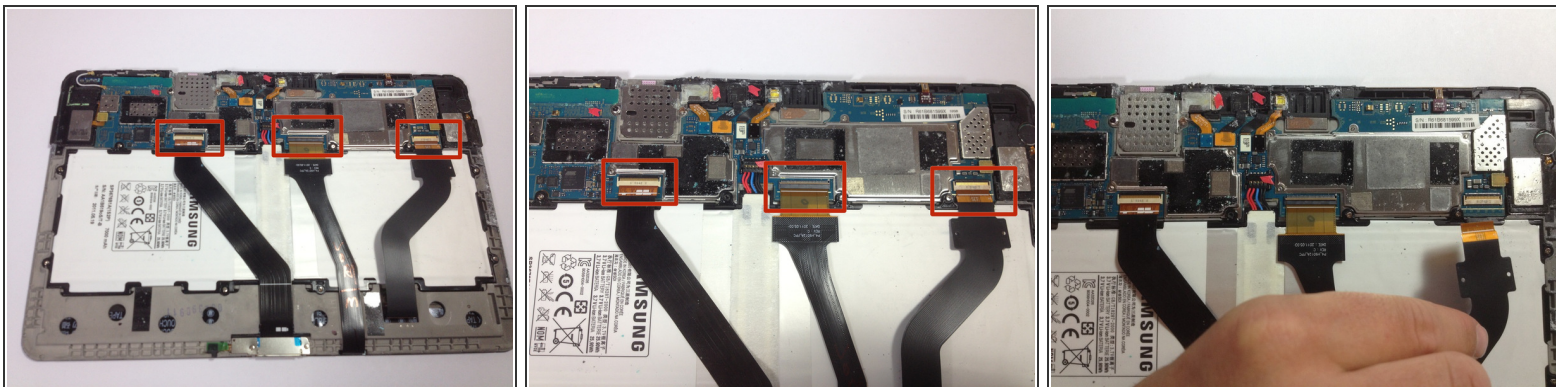


- Flip up the retaining flaps on the ZIF connectors that secure the three large ribbon cables.
- Carefully pull the three ribbon cables from their sockets on the motherboard.

Step 5

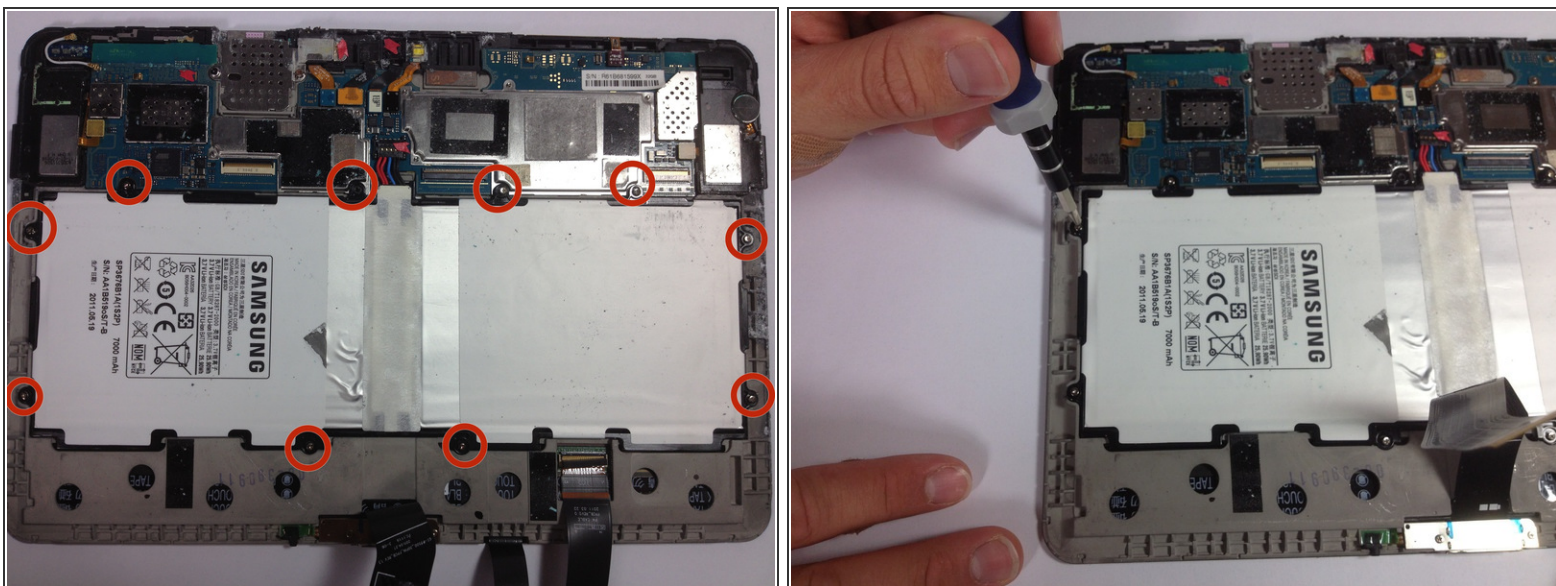

- Remove the ten 3 mm Phillips #00 screws surrounding the battery.

Step 6

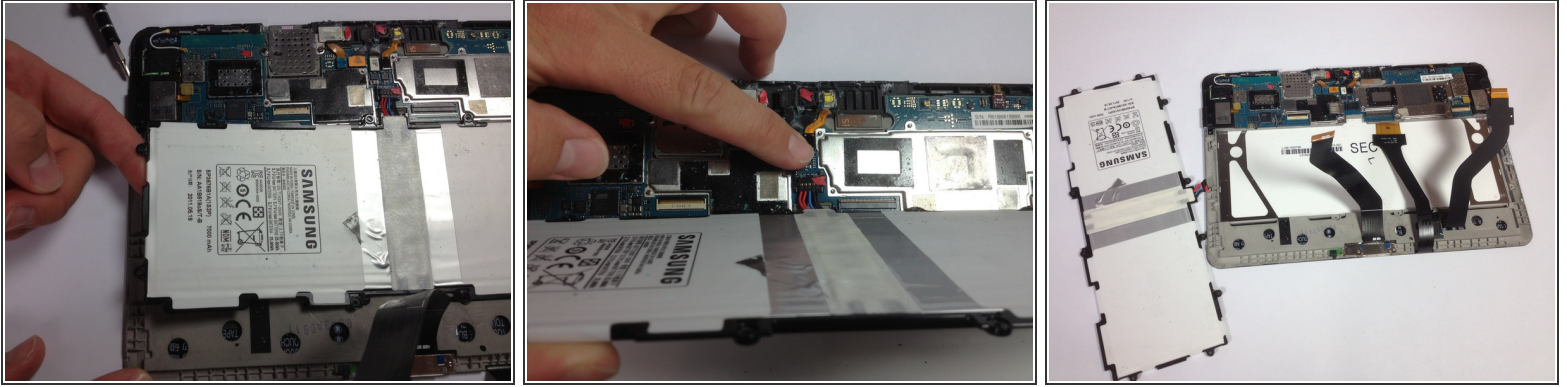

- Lift the edge of the battery up with your finger or a spudger.
- Detach the battery by holding the motherboard down while gently lifting the battery up.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-17 11:00:11 AM.